


Optional WIFI intelligent control function



· Hot sale model is more popular

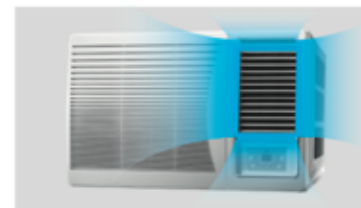

· Auto ventilation

Unit can introduce a certain proportion of fresh air to meet the requirements of fresh air.



· Soft start

Off-peak power supply for mitigating pressure of public power grid.

K Panel

On-Off R410A

Model		GJG9AA-E3NRND2B	GJCY2AF-E3NRND2B	GJC18AG-E3NRND2B	GJC9AA-E3NRND2B
Function		Cooling	Cooling	Cooling	Cooling
Capacity	Cooling	W	2500	3450	5200
EER/COP		WW	2.82	2.82	2.82
Power Supply		Ph, V, Hz	1Ph, 230V, 50Hz	1Ph, 230V, 50Hz	1Ph, 230V, 50Hz
Power Input	Cooling	W	887	1223	1844
Rated Current	Cooling	A	6.7	7.7	12
Airflow Volume	Indoor	m ³ /h	350/300/250	450/400/350	670/620/570
Sound Pressure Level	Indoor	dB(A) (HML)	50/48/46	50/49/46	52/50/48
Outline Dimension	WxHxD	mm	450*350*580	560*428*700	450*350*580
Package Dimension	WxHxD	mm	521*374*671	623*425*766	521*374*671
Net Weight /Gross Weight	Indoor	Kg	34/37	46/50	56/61
Loading Quantity	40'GP	sets	444	285	184
	40'HQ	sets	518	342	230

C Panel

On-Off R410A

Model		GJCY2AF-K3M7B3A	GJC18AG-K3M7C6A	GJC24AE-K3M7C6A
Function		Cooling	Cooling	Cooling
Capacity	Cooling	W	3517	T1: 5275 T3: 4425
EER/COP		WW	2.95	T1: 2.9 T3: 2.1
Power Supply		Ph, V, Hz	1Ph, 220-240V, 50Hz	1Ph, 220-240V, 50Hz
Power Input	Cooling	W	1192	T1: 1820 T3: 2110
Rated Current	Cooling	A	9	13
Airflow Volume	Indoor	m ³ /h	460/410/360	650/590/530
Sound Pressure Level	Indoor	dB(A) (HML)	51/49/47	53/51/49
Outline Dimension	WxHxD	mm	560*379*668	660*428*700
Package Dimension	WxHxD	mm	623*425*766	739*505*793
Net Weight /Gross Weight	Indoor	Kg	46/49	54/58
Loading Quantity	40'GP	sets	285	184
	40'HQ	sets	342	230